

Techwell

TW9918

Multi-Standard Video Processor with RGB Mixing and 3D Comb Filter

Introduction

Techwell's TW9918 is a high quality multi-standard 3D Comb filter video decoder plus RGB mixing and high quality down scaler designed for multimedia applications.

TW9918 uses the mixed-signal 3.3V CMOS technology to provide a low-cost and low-power integrated solution. Minimum external components are required due to its integrated analog front-end containing AGC, clamping, and 9-bit high speed ADCs.

The TW9918 uses proprietary adaptive 3D comb filter to achieve best NTSC quality. For the PAL standard, it employs 4H comb filter for chroma and luma separation to achieve high video quality.

The image enhancement includes two dimensional peaking control, noise reduction, and color transient improvement function.

The advanced synchronization processing can produce stable pictures for non-standard signal such as those produced by VCR during fast forward, rewind or pause.

The high quality scaler uses multi-tap poly-phase decimation filter to reduce aliasing effects. It can be programmed to scale-down the output picture to an arbitrary ratio with cropping.



Techwell's TW9918
128-pin PQFP package

Features

Analog Video Decoder and Analog Component Input

- NTSC (M, 4.43) and PAL (B, D, G, H, I, M, N, N combination), PAL (60), SECAM support with automatic format detection
- Advanced synchronization processing for VCR fast forward, backward, and pause mode
- Software selectable analog inputs allows any of the following combinations:
 - Up to six CVBS, two S-Video inputs, with one CVBS output
 - two RGB/YCrCb component inputs, two Fast Blank (FB) inputs
- Integrated 9-bit ADCs and analog clamping circuit.
- Fully programmable static gain or automatic gain control for the Y or CVBS channel
- Programmable white peak control for the Y or CVBS channel

Video processing

- High quality motion adaptive 3D comb filter for NTSC.
- High quality mixing by Fast Blanking signal
- Intelligent adaptive 4H comb filter for PAL for best image quality.
- PAL delay line for color phase error correction
- Image enhancement with programmable horizontal as well as vertical peaking.
- CTI and noise reduction circuitry
- Digital sub-carrier PLL for accurate color decoding
- Digital Horizontal PLL and advanced synchronization processing for non-standard video signals
- Separated tint, brightness, saturation, and contrast control for RGB/ YCrCb and CVBS/S-video
- Automatic color control and color killer
- High quality horizontal and vertical filtered scaling with arbitrary scale down ratio
- Detection of level of copy protection according to Macrovision 7.1 standard

Video Output

- Programmable output cropping
- VMI 1.4 compatible 8-bit or 16-bit pixel interface
- ITU-R 601 or ITU-R 656 compatible output YCbCr(4:2:2) output format
- VBI data pass through
- VBI slicer supporting worldwide industrial standard data services

Miscellaneous

- Two wire MPU serial bus interface
- Power-down mode
- Typical power consumption 1.0W
- Single 27MHz crystal for all standards
- Field locked audio clock generator
- Supports 24.54MHz and 29.5MHz crystal for high resolution square pixel format
- 5V tolerant I/O
- 3.3 V power supply
- 128-pin PQFP package

408 East Plumeria Drive, San Jose CA 95134 USA

Tel: (408) 435-3888

Fax: (408) 435-0588

www.techwellinc.com

DMA

Techwell

TW9918

Multi-Standard Video Processor with RGB Mixing and 3D Comb Filter

Overview

Techwell's TW9918 is a high quality multi-standard comb filter video decoder plus RGB mixing and high quality down scaler designed for multimedia applications.


The TW9918 analog front-end is equipped with six separate low noise analog channels that enable it to accept various analog video input standard including Composite video, S-video, component video (YCrCb), and SCART RGB.

The TW9918 uses proprietary adaptive 3D comb filter to achieve best NTSC quality. For the PAL standard, it employs 4H comb filter for chroma and luma separation to achieve high video quality.

The TW9918 supports flexible pixel interface. It outputs YCbCr (4:2:2) data stream over 8-bit or 16-bit data path. The output is VMI 1.4 compatible.

A 2-wire serial MPU interface is used to simplify system integration. All the functions can be controlled through this interface.

Standalone Video Decoder with 3rd party High End 3D Video Controller

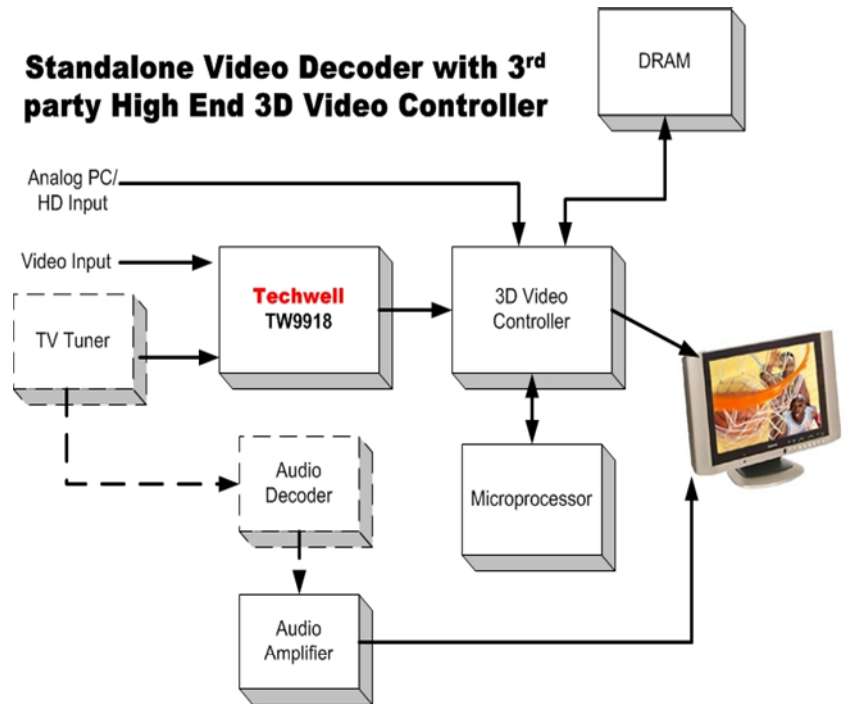

**Sample System Block Diagram
for High End LCD TV**

About Techwell Inc.

Techwell is a privately held fabless semiconductor company developing proprietary digital video decoding technology that converts a variety of analog video signals into standard digital video formats. As a core building block in any video display or video storage application, we have spent over 7 years perfecting our digital video decoder core to meet the strictest performance, robustness and feature requirements while maintaining a highly dense architecture to minimize die size and deliver the lowest cost solutions in the marketplace.

To leverage our video decoding technology, we supply a family of general-purpose video decoders that target high growth video display and video storage applications including Advanced LCD, Plasma and CRT TV, Recordable DVD & HDD players and Media Center PCs. In addition, we develop integrated application specific ICs for specialty markets including security surveillance, Car TV, Portable DVD and PC TV Capture Cards.

408 East Plumeria Drive, San Jose CA 95134 USA

Tel: (408) 435-3888

Fax: (408) 435-0588

www.techwellinc.com